




Simple Automation™ Stretch Wrapping System

antec



Drop one load off. Pick one load up. No double handling.

- All of the features and benefits of the Q-300XT with even more automation.
- · Wraps load and moves it out of the way for the next load.
- · Eliminates double-handling of load by forklift operator.
- Standard load-on-conveyor configuration accommodates two pallets.
- Add additional conveyor sections to optional load on turntable configuration to accommodate up to four pallets.
- No scheduled preventative maintenance.

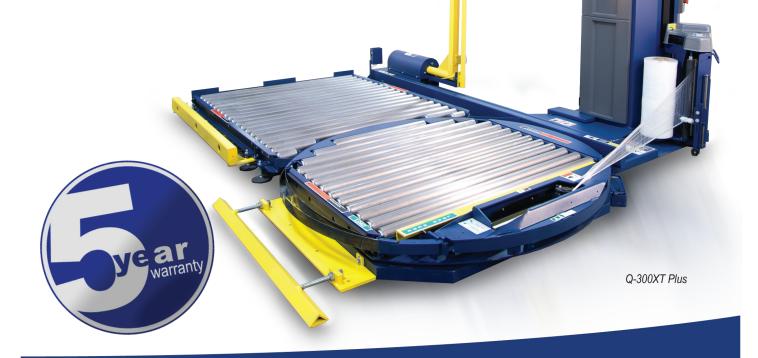

More Lantech field-tested packaging solutions @ www.lantech.com

Q-300XT Plus Rev. 03/31/15 Page 1 of 2

Q-300XT Plus

Boost your machine's performance with these features:

Pallet Grip®

Don't Take More Risk Than You Have To!

Millions of loads slide off their pallets during shipment each year, causing billions of dollars of rework and waste.



Pallet Grip (patented) rolls up a film cable and drives


it down onto the pallet, locking the load. This makes sure your load does not slide off during transit.

Additional Conveyor

Maximize Your Staging Area!

Get more control of your stretch wrapping

operation. Accumulate up to 4 loads.




Load on turntable option only.

Click-n-Go™

Stretch Wrapping Loads at the Touch of a Button!

Enhances portability by eliminating requirement to install a ceilingmounted lanyard.


Each unit can handle up to 3 machines.






Old Way - "The Forklift Dance"

Six(6) load handling moves required to wrap two loads on one stretch wrapper.



Q-300XT Plus Way - "Simple Automation™"

Only two(2) moves needed. Place load to be wrapped on infeed conveyor and go with the "wrapped" load. Eliminates double and triple load handling.



Q-300XT Plus Specifications

PERFORMANCE CRITERIA Production Speed Standard Pallet Size Maximum Load Height Maximum Load Weight	30 loads per hour 40" x 48" 75" 4000 lbs.
LOAD HANDLING SYSTEM Turntable Size Turntable Drive Turntable Speed	65" Diameter 1 HP TEFC Motor 1-12 RPM
FILM DELIVERY SYSTEM ■ Power-Roller Stretch Plus System ■Wrap Force ■ Film Capacity	200% Standard (100%-300% available) Electronically controlled 10" Roll Diameter, 20" Film Web Width
MACHINE SHIPPING WEIGHT Machine Size Shipping Weight (including skid - approximate)	123"L x 135"W x 93"H 2650 lbs.
ELECTRICAL REQUIREMENTS Machine Voltage Microcontroller Wrap Cycle Pause	240V, 16 Amp Standard Standard
SERVICE SUPPORT PHONE NUMBER	24 hrs/7 days a week 800-866-0322

Specifications subject to change without notice. Lantech systems and sub-systems are protected by U.S. and foreign patents. Additional U.S. and foreign patents pending. © Lantech

Q-300XT Plus Rev. 03/31/15

Lantech.com • 11000 Bluegrass Pkwy. • Louisville, KY 40299-2399 USA • 800-866-0322 • www.lantech.com

Page 2 of 2

MEMBER